
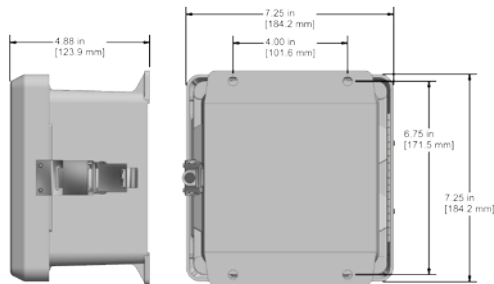


MX102/MX202

Fiberglass (MX102) or Stainless Steel (MX202) MAXX Boxes
1 - 12 Channels



MX102

Fiberglass Enclosure

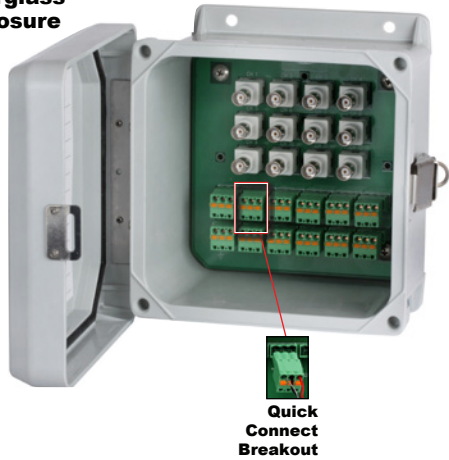

MX202

Stainless Steel Enclosure

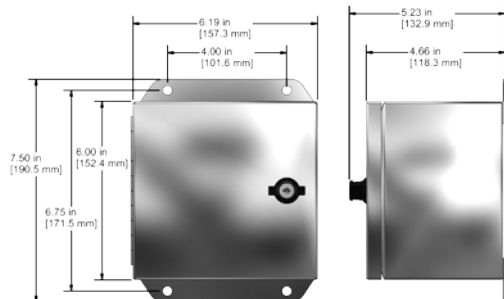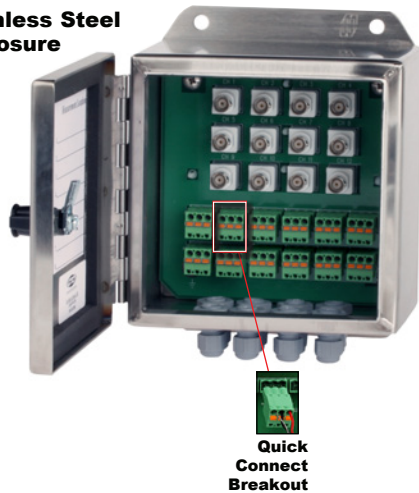

Product Features

Easily Accessible BNC Jacks

Up to 12 BNC jacks are mounted in one safe and convenient location for quick access

- Connects remotely installed sensors to portable data collectors
- Withstands harsh factory and outdoor environments
- Quick-release input terminal blocks

Specifications

	MX102	MX202
Inputs	Terminal Block 3 Inputs per channel (+, -, Shield)	
Output	BNC Jack Per Channel Electrically Isolated	
Rating	NEMA 4X (IP66)	
Door Closure	Snap Latch	Twist Lock
Material	Fiberglass	Stainless Steel
Temperature Rating	-58° to 180° F (-50° to 82° C)	
Resistance	Resistant to Hose Directed Fluid and Corrosion	

Ordering Information

MX -

Enclosure Type
102 = Fiberglass Enclosure
202 = Stainless Steel Enclosure

Channels
1 = 1 Channel
2 = 2 Channels
3 = 3 Channels
4 = 4 Channels
5 = 5 Channels
6 = 6 Channels
7 = 7 Channels
8 = 8 Channels
9 = 9 Channels
10 = 10 Channels
11 = 11 Channels
12 = 12 Channels

Input Options

- A = *User Defined
- B = **Conduit Fitting
- C = Cord Grips
- S = †Stainless Steel Cord Grips

Example Part Number: **MX102-4C**

MAXX box, 4 channel, NEMA 4X enclosure, w/cord grips installed

* No punch outs are provided in the enclosure for cable entry. User may install any fitting required.

** For use with rigid body conduit.
† Stainless Steel enclosure only.

Backed by our Unconditional Lifetime Warranty

www.ctconline.com

