

COMPRESSION MODE VS. SHEAR MODE SENSOR DESIGNS




WHEN RELIABILITY MATTERS
CONNECT TO CONFIDENCE

The two primary sensor designs for dynamic vibration measurements are compression mode and shear mode. Below is an analysis of the primary benefits and tradeoffs between the two designs.

	Compression Mode	Shear Mode
Sensing Element Construction	Mass, ceramic, conductive material and base held together by a screw	Mass, ceramic, conductive material and base held together by epoxy (or similar substance)
Cost	Lower cost	Higher cost
Reliability	More prone to failure over time	Less prone to failure over time

As CTC is committed to offering the most durable and reliable sensors on the market, all of our sensors feature the shear mode design.

COMPRESSION MODE DESIGN

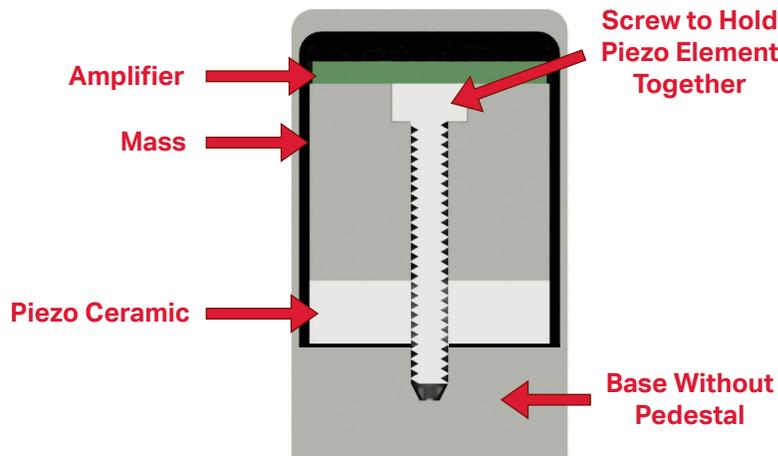


The main flaw with this historical design is the stud holding the design together. This stud will expand and contract due to temperature changes. This change can be induced by a machine going from stopped to running, running to stopped, or other operational equipment nearby giving off additional heat or ambient temperatures such as weather in non-temperature controlled environments. A familiar, real-world example of this concept is how pavement will expand and contract due to weather (and eventually crack). The more extreme the temperature changes are, the more impact the screw (and sensing element) may experience over time.

Compression mode sensors will perform well, especially in a lab setting and after the installation. The primary difference is that the shear mode design is less likely to fail over extended periods.

The main advantage of a compression design is the upfront cost. These sensors are much cheaper to build; hence the cost per sensor is typically less than a shear mode sensor. However, additional costs may appear down the line due to decreased reliability.

Compression designs were previously utilized because they had a higher mounted resonant frequency than shear mode designs at one time. As the shear mode technique has been perfected over many years, this advantage has been far removed.

SHEAR MODE DESIGN

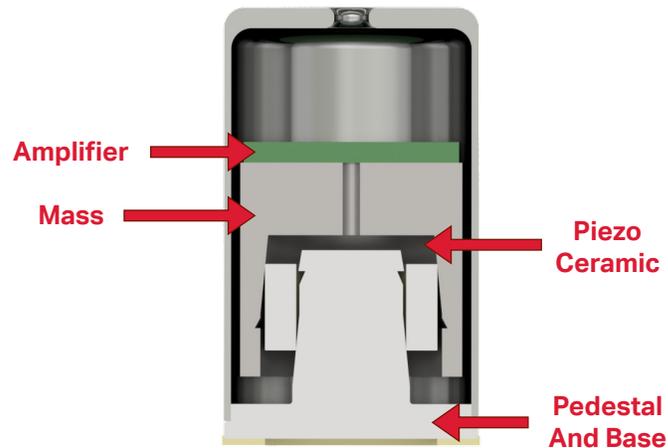

In a shear mode design, no stud holds the internal components together. Most designs use a form of epoxy cured under heat to maintain structure. The base and the mass have no contact, so there is no metal-to-metal contact within the sensing element, which significantly reduces the impacts of thermal transients.

These sensors are great for longevity and deliver a quality signal, typically between 0.1 kHz to about 30 kHz, with a linear frequency response given a tolerance of ± 3 dB.

The downside is shear mode sensors can cost more upfront than compression mode sensors. However, shear mode sensors will last longer, saving time and cost in the future.

The shear mode design is known to have a lower base strain sensitivity than the frequency at which a running machine will experience strain, which is another advantage of this design. It prevents these sensors from transmitting unwanted data in applications affected by strain.

CTC is the world leader in the design and manufacture of industrial accelerometers, piezo velocity transducers, 4-20 mA vibration sensors, and proximity probes as well as all related mounting hardware, cabling, and junction boxes. Our products enable efficient vibration monitoring for predictive maintenance in a wide variety of industries. Industries served include cement, mining, petrochemical, food & beverage, auto, steel, wind, paper & pulp, power generation, water & wastewater treatment, pharmaceutical, hospitals, bottling, and more. Our mission is to offer the widest variety of accelerometers and vibration hardware products, which are compatible with data collectors and online monitoring systems, as well as the tools for installation.



The CTC product line features vibration analysis hardware for heavy industry.

All CTC products are backed by our unconditional, lifetime warranty. If any CTC product should ever fail, we will repair or replace it at no charge.



The PRO line offers the industry's most reliable proximity probe sets.

All PRO products are backed by a lifetime warranty on materials and workmanship. PRO will repair or replace any of our products as long as the product was not subjected to misuse, neglect, natural disasters, improper installation, or modification.

All stock products may be returned for a 25% restocking fee if returned in new and unused condition within 90 days of shipment. Built-to-order and private-label products qualify for a 50% refund if returned in new and unused condition within 90 days of shipment. Custom products are quoted and built specifically to the requirements of the customer, which may include completely custom product design or private-labeled versions of standard products for OEM customers. Custom products are non-cancellable, non-returnable, and non-refundable.

