


Cable Anchoring

All CTC cables are shielded. The cable shield protects the signal from EMI and ESD. Grounding the shield at only one point is best practice, generally to your analyzer equipment.



The cable should be secured for permanently mounted sensors to reduce stress and flexing that may result in cable breakage or noise. CTC's CB929 cabling loop clamps are an excellent tool for anchoring cabling. It is important to ensure there is enough slack so as not to stress the sensor connection.

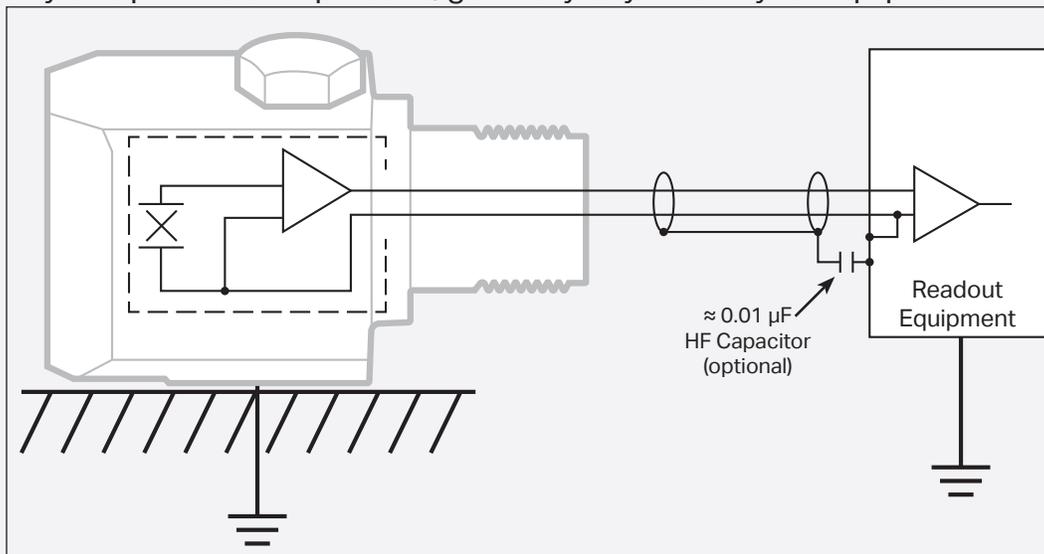